



CK 97-C/L

- **Miniature cardioid capsule for minimum ambience pickup**

The CK 97-C/L is perfectly suited for "invisible" miking. A consistent cardioid pattern ensures good separation, minimum ambience pickup, and high gain before feedback in live sound applications.

With female 3-pin mini XLR connector for use with an AKG pocket transmitter.


The CK 97-C comes complete with a windscreen, tie pin, hanger adapter, and lavalier clip.

Specifications

Type	self-polarized condenser microphone
Polar pattern	cardioid
Frequency range	150 to 18,000 Hz
Sensitivity	40 mV/Pa (-38 dBV re 1 V/Pa and 6 V supply voltage)
Max. SPL	120 dB at 1,000 Hz, for 10,000 ohms load impedance and 1 % T.H.D.
Equivalent noise level	28 dB-A
Signal/noise ratio (A-weighted)	66 dB
Impedance	≤ 4000 ohms
Recommended load impedance	≥ 10000 ohms
Supply voltage	1 to 12 V
Connector	3-pin mini XLR
Cable	10 ft. (3 m)
Finish	matte gray
Net weight	6 g / 0.2 oz.
Shipping weight	200 g / 7.1 oz.



Frequency curve and polar pattern

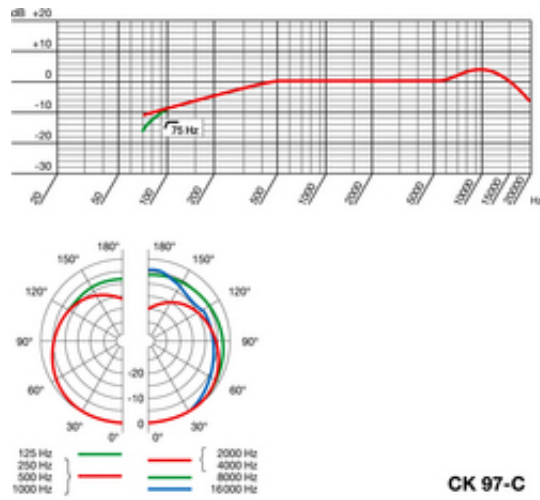

Engineer's specifications