


Dimensions [mm.]:

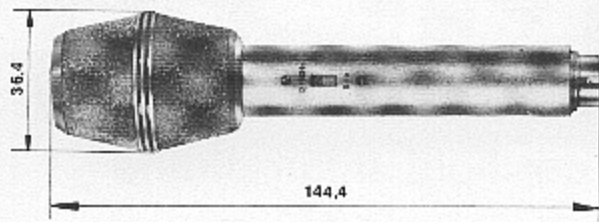


D 124

Robust sintered bronze grill

Elastically suspended system
reduced handling noise


FREQUENCY RESPONSE CURVE:

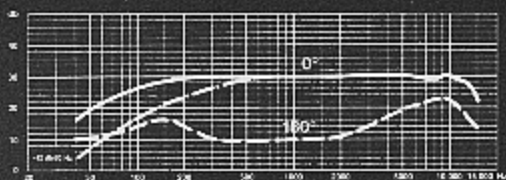

Matt satin gray metal shaft
(non-reflecting finish)

Available with DIN and Cannon
connections

D 124C:

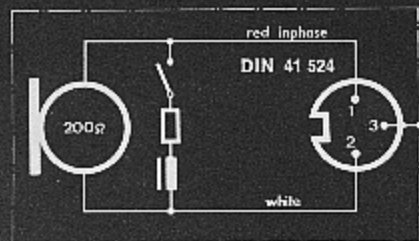

Technical data:

Type: Dynamic pressure gradient receiver
Frequency Response: 40 ... 17 000 Hz
Tolerance within: max. ± 2.5 dB
Sensitivity at 1000 Hz: 0.14 mV/bar (-77 dbv)
Impedance at 1000 Hz: 240 ohms $\pm 20\%$
Min. Actual Load Impedance: 600 ohms
Directional Polar Response: Cardioid
Max. Sound Pressure Level for a non linear distortion factor of 1%:
2000 μ bar (140 db SPL)
Diaphragm: MAKROFOL®

Microphone head in
typical AKG-design


In built wind- and pop screen
(delivery includes additional
foam rubber wind shield)

POLAR DIAGRAM:



Bass Roll off Facility
(switchable from 0 to -12 db with
standard screwdriver)

D 124E:

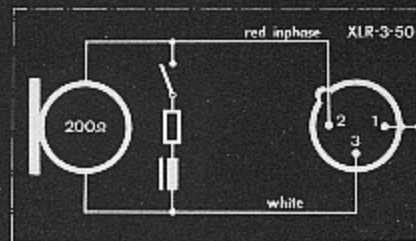

When ordering please note:

D 124C: with built-in 3-conductor DIN-plug T 3262, windscreen W 21
included

D 124E: with built-in 3-conductor Cannon-plug XLR-3-50, windscreen W 21
included

Weight:

D 124: 170 grams

With individual packing: approx. 470 grams

Accessories:

(How to order please refer to the price-list)

Windscreen: W 21

Elastic suspension: H 15

Stand adapter: SA 25/1

Table stands: St 1, St 4, St 12, St 305

Upright stand with shock absorbers: St 12, St 200, St 305

Boom stand: St 30, St 102A

Mating connector: D 124C: 3-conductor connector according to
DIN 41 524

D 124E: 3-conductor Cannon XLR-3-11C connector

Microphone cables: D 124C: MK 1/5

D 124E: MK 4/5