


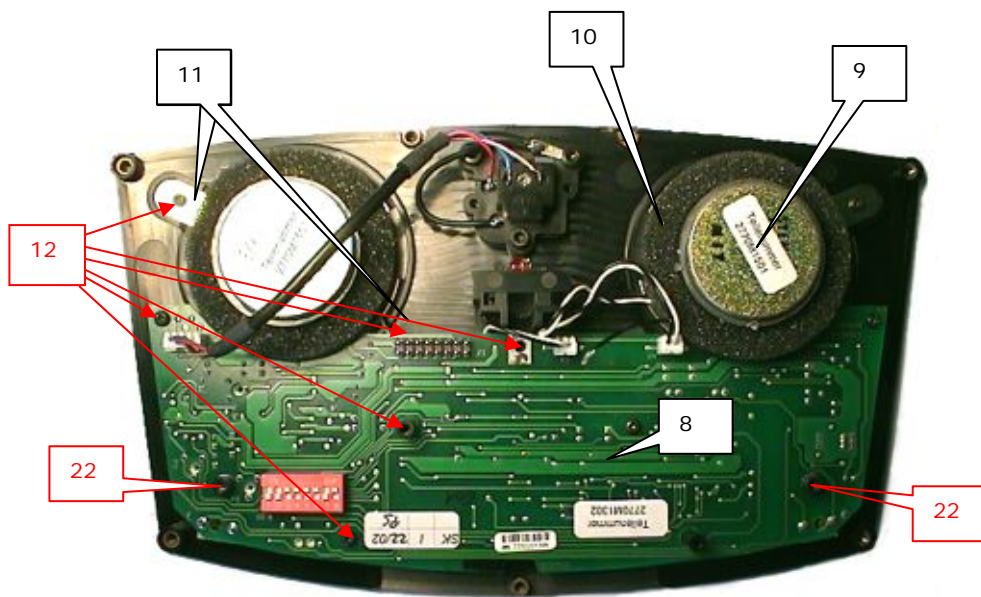
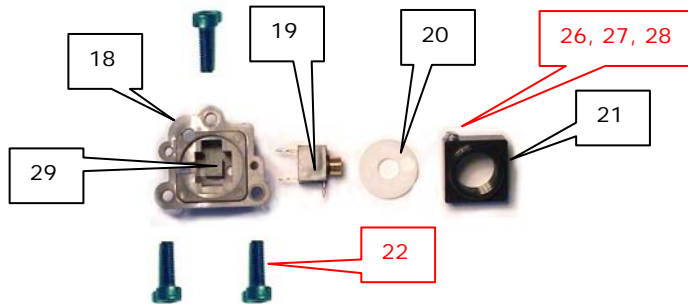
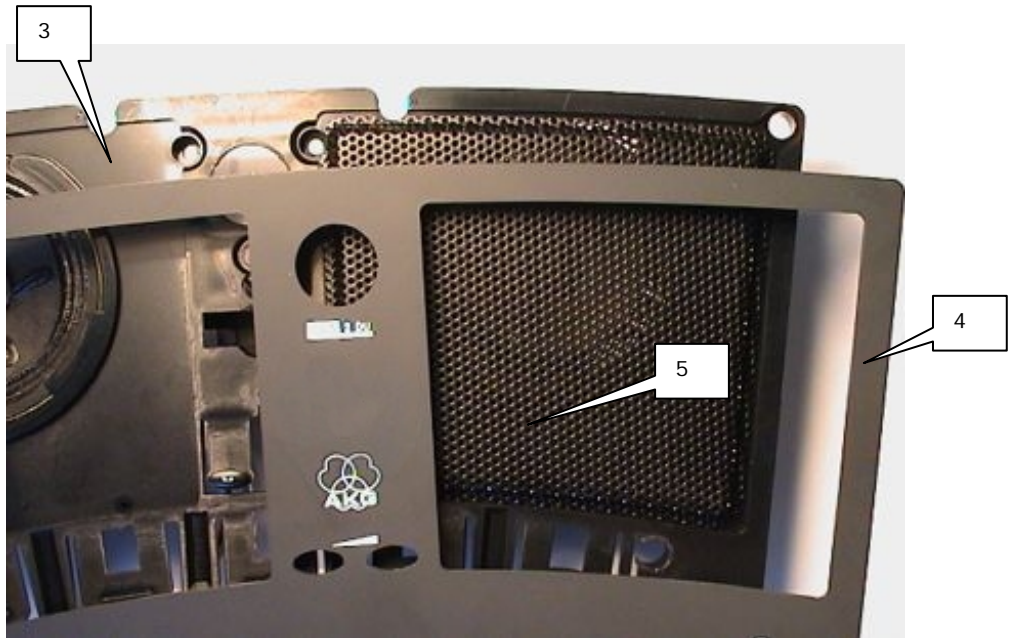


Holes for 7 screws item "15" / Bohrungen für 7 Schrauben Pos. "15"

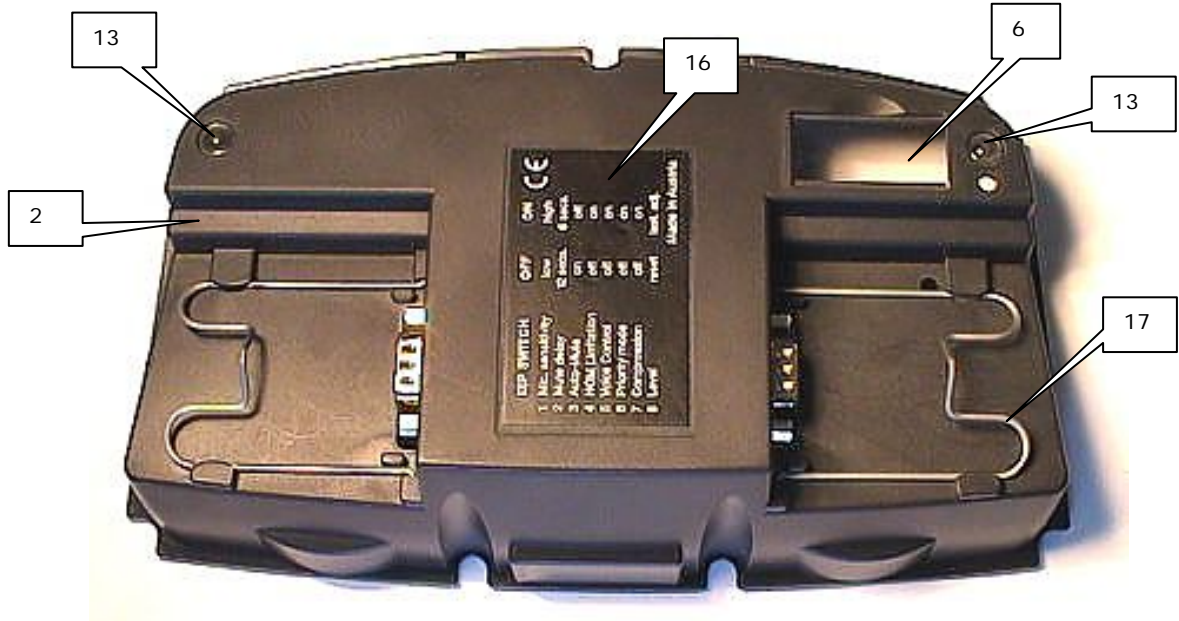

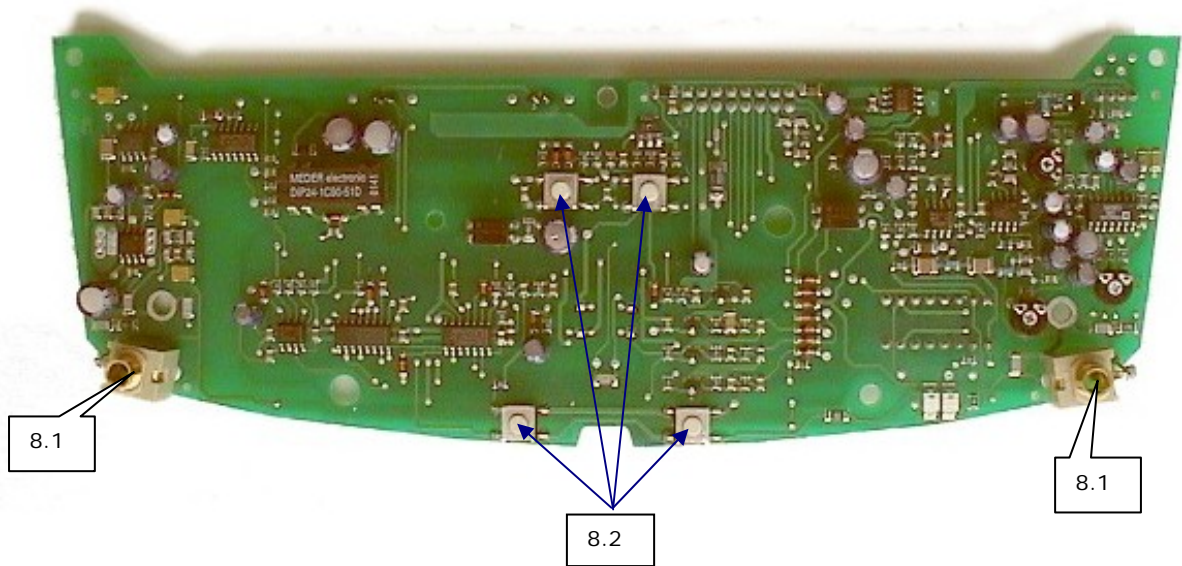

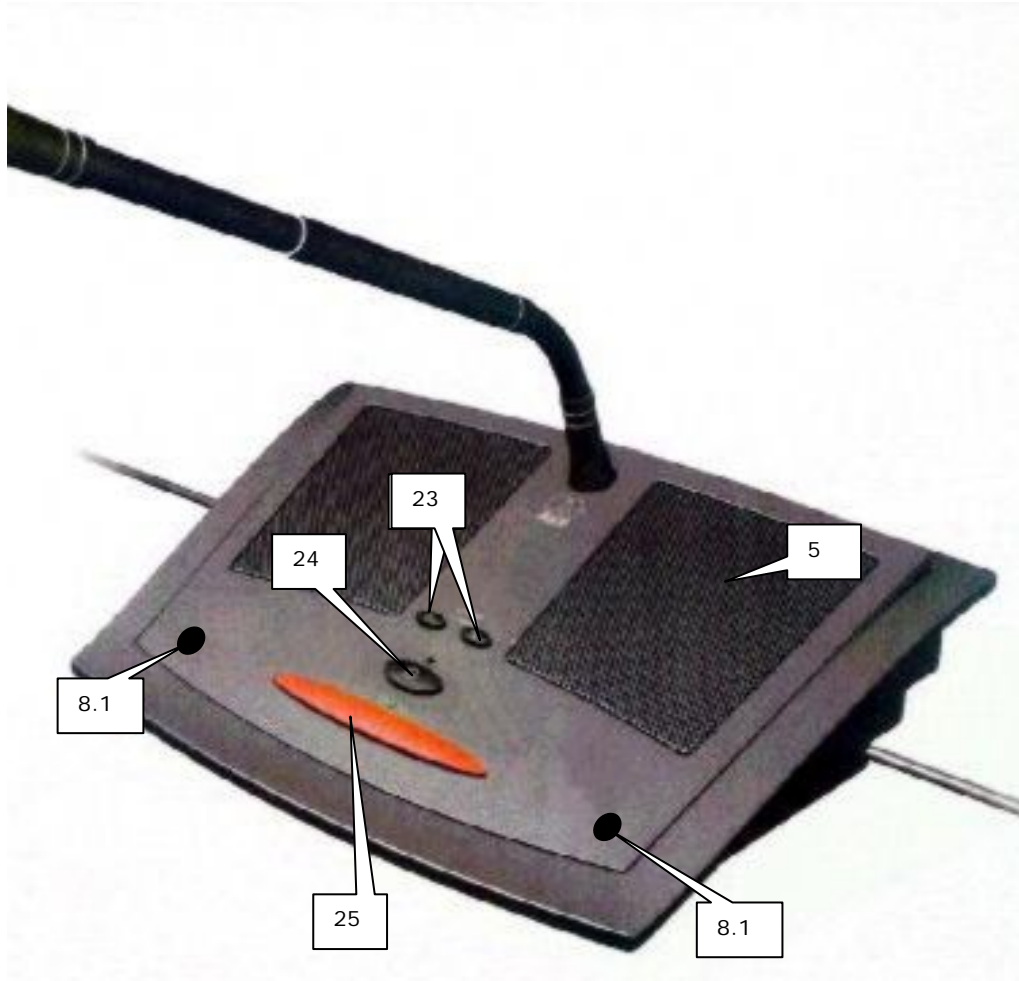

AKG Acoustics GmbH, A Harman International Company, Lemböckgasse 21-25, A-1230 Wien, Austria
Phone: (+431) 86654-1519, Fax: (+431) 86654-1514, e-mail: service@akg.com www.akg.com

CS 2 DU	Delegate Station for mobile use	2770Z0002
CS 2 DU fix	Delegate Station with fix install frame	2770Z0004
CS 2 CU	Chairman Station for mobile use	2770Z0001
CS 2 CU fix	Chairman Station with fix install frame	2770Z0003

Description	Item Pos	Part Nbr. Best.-Nr.	Quantity / Stück				Bezeichnung
			DU mobile	DU fix	CU mobile	CU fix	
Outer housing	1	2770Z1001	1	-	1	-	Außengehäuse
Frame	1	2770Z1101	-	1	-	1	Rahmen
Inner housing	2	2770Z1201	1	1	1	1	Innengehäuse
Plate, old	3	(2770Z1401)	1	1	1	1	Platte, old
Plate	3	2770Z3001	1	1	1	1	Platte
Front panel	4	2770M0501	-	-	1	1	Frontplatte
Front panel	4	2770M0502	1	1	-	-	Frontplatte
Loudspeaker grill (set of 2 pcs.)	5	2770M1601	1	1	1	1	Lautsprechergitter (= 2 Stk.)
Cover for DIP switch	6	2770Z2401	1	1	1	1	Deckel für DIP Schalter
Board, complete	7	2770M1201 S-568/1	1	1	1	1	Print, komplett
Board, complete	8	2770M1301 S-569/2A	-	-	1	1	Print, komplett
Board, complete	8	2770M1302 S-569/2	1	1	-	-	Print, komplett
Headphone socket	8.1		2	2	2	2	Kopfhörerbuchse
Key switch	8.2		4	4	5	5	Tastenschalter
Loudspeaker	9	2770M1501 OLS-57SFH-01-50B	2	2	2	2	Lautsprecher
Foam ring	10	2770Z2901	2	2	2	2	Schaumstoffring
Clamp for loudspeaker	11	2770Z1901	4	4	4	4	Lautsprecherhalter
Screw K25x6 WN1412	12	0099N2503	14	14	14	14	Schraube K25x6 WN1412
Foot with adhesive	13	9999N0676	4	4	4	4	Fuß, selbstklebend
Light guide	14	0013E0193	1	1	1	1	Light guide
Screw M3x10	15	0912D3001 or/oder 7985D3006	7	7	7	7	Schraube M3x10
Nameplate	16	9110U3149	1	1	1	1	Typenschild
Cable holder	17	2770Z2701	2	2	2	2	Kabelhalter
Lid	18	2765Z4301	1	1	1	1	Deckel
Jack socket	19	0017E0353	1	1	1	1	Klinkenbuchse
Washer	20	9021D0640	1	1	1	1	Scheibe
Holder	21	2765Z4001	1	1	1	1	Halter
Screw M3x8	22	7985D3004	5	5	5	5	Schraube M3x8
Key "Volume" right	23	2770M0201	1	1	1	1	Taste "Lautstärke" rechts
Key "Volume" left	23	2770M0202	1	1	1	1	Taste "Lautstärke" links
Key "Priority"	24	2770M0306	-	-	1	1	Taste "Priority"
Key "Press to talk"	25	2770M0401	1	1	1	1	Sprechtaste
Screw M2x4	26	0070N2000	1	1	1	1	Schraube M2x4
Toothed washer	27	6797D2200	1	1	1	1	Zahnscheibe
Solder tag	28	4149N6041	1	1	1	1	Lötflügel
Pad	29	2601Z0903	1	1	1	1	Anpressstück

Connection cables for CS2 BU → CU → DU:

CS MK 1,25 fm	Delegate connection cable 1,25 m	2770Z0011
CS MK 2,5 fm	Delegate connection cable 2,5 m	2770Z0012
CS MK 5 fm	Delegate connection cable 5 m	2770Z0013
CS MK 10 fm	Delegate connection cable 10 m	2770Z0014
CS MK 20 fm	Delegate connection cable 20 m	2770Z0015

Components for making cables:





CS MK 100/oc/mob	100 m cable for mobile solution	6001H3611
CS CON fm/mob	Connector, female	6000H3622

Mains cables for BU2:

CS MK AC – EU	AC cable for Europe Standard	6000H3602
CS MK AC – US	AC cable for USA Standard	6000H3603
CS MK AC – UK	AC cable for UK Standard	6000H3604


CONNECTION - CABLES FOR CS2

Pin - Layout

color	kind of conductor	to connector pin:
red	single conductor	PIN 1  linked
		PIN 2  linked
		PIN 3  linked
blue	single conductor	PIN 4  linked
		PIN 5 + housing
green	screened pair	PIN 6
yellow		PIN 7
screen		PIN 8
white / green	single conductor	PIN 9
brown / green	single conductor	PIN 10
white	screened pair	PIN 11
brown		PIN 12
screen		PIN 13
black	single conductor	PIN 14
violet	single conductor	PIN 15

Translation of German Terms

Ansicht	view
Außenschirm	outer screen
blau	blue
braun	brown
gelb	yellow
grün	green
halbiert	devided in two halves
Lötseite	solder side
rot	red
Schirm	screen
schwarz	black
verdrillt	twisted
verzinkt	tinned
violett	violet
weiß	white

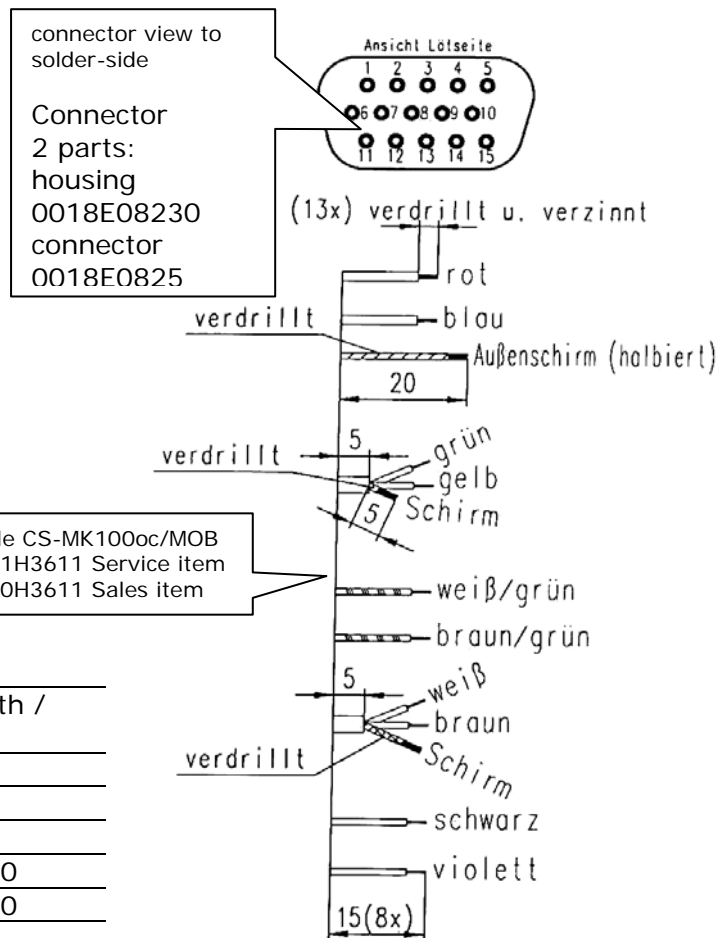

Part numbers

Part number	Designation	Length / mm
2770Z0011	CS-MK 1,25 fm	1250
2770Z0012	CS-MK 2,5 fm	2500
2770Z0013	CS-MK 5 fm	5000
2770Z0014	CS-MK 10 fm	10000
2770Z0015	CS-MK 20 fm	20000